

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**


In re Application of

Mika FORSELL

Serial No.: 10/687,209

Filed: October 16, 2003

For: Method and Device for Transferring Data  
Over GPRS Network



Mail Stop  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

**LETTER TRANSMITTING PRIORITY DOCUMENT**

SIR:

In order to complete the claim to priority in the above-identified application under 35 U.S.C. §119, enclosed herewith is a certified copy of each foreign application on which the claim of priority is based: Application No. **20021869**, filed on October 18, 2002, in Finland.

Respectfully submitted,  
COHEN, PONTANI, LIEBERMAN & PAVANE

By

A handwritten signature in black ink, appearing to read "Michael C. Stuart".

Michael C. Stuart  
Reg. No. 35,698  
551 Fifth Avenue, Suite 1210  
New York, New York 10176  
(212) 687-2770

Dated: January 30, 2004

PATENTTI- JA REKISTERIHALLITUS  
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 13.8.2003

E T U O I K E U S T O D I S T U S  
P R I O R I T Y D O C U M E N T



Hakija    Nokia Corporation  
Applicant                                      Helsinki

Patentihakemus nro 20021869  
Patent application no

Tekemispäivä 18.10.2002  
Filing date

Kansainvälinen luokka      **H04L**  
International class

Keksinnön nimitys  
Title of invention

"Method and device for transferring data over GPRS network"  
(Menetelmä ja laite pakettidatan siirtämiseksi langattomassa pakettidataverkossa)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

  
Pirjo Kaila  
Tutkimussihteeri

Maksu	50 €
Fee	50 EUR

Maksu perustuu kauppa- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328  
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328  
FIN-00101 Helsinki, FINLAND

## Method and device for transferring data over GPRS network

### TECHNICAL FIELD OF THE INVENTION

5 The present invention relates to transferring data over a radio interface in General Packet Radio System (GPRS) networks.

### BACKGROUND OF THE INVENTION

10 In wireless telecommunication systems information is transferred over the radio interface between a transmitting and/or receiving communication device and a communication network. In General Packet Radio System (GPRS) networks, such as GPRS, Enhanced GPRS (EGPRS) and GSM Enhanced Data rate for Global Evolution (EDGE) Radio Access Network (GERAN) efforts has been made to improve the quality of the data transfer and thus the quality of service (QoS). The term GPRS also relates to EGPRS, GERAN and other enhancements of the GPRS in the  
15 present application.

20 A mobile station (MS), a base station sub-system (BSS) comprising a base transceiver station (BTS) and a base station controller (BSC) including a Packet Control Unit (PCU), and a serving GPRS support node (SGSN) are the main components of the GPRS architecture for communicating between a terminal device and the GPRS network. A gateway GPRS support node (GGSN) enables data transfer between the GPRS network and external data networks, such as an Internet. One or more GGSNs are connected to a SGSN via Internet Protocol (IP) based GPRS backbone network. When the MS communicates with external data networks, the GGSN operates as an IP router between a MS and the external network. Packet data channels (PDCH) are used as physical channels for the packet data transfer in the GPRS. To  
25 transfer user data, i.e. other data not produced by the GPRS protocols, a Packet Data Protocol (PDP) context is generated. All messages including PDP context messages are transferred using a Temporary Block Flow (TBF) between a MS and GPRS network.

30 The Logical Link Control (LLC) protocol is used to transfer data between a MS and a SGSN in the GPRS network. The technical specifications of the LLC layer protocol to be used for Packet Data Transfer (PDT) between a MS and SGSN are defined

in the document 3GPP TS 44 064 V 4.3.0 (2002-03) [1]. The LLC layer is independent of the underlying radio interface protocol. The LLC protocol layer consists of Logical Link Management Entities (LLME), Logical Link Entities (LLE) and a multiplex procedure. A LLE is the LLC layer protocol state machine controlling one  
 5 logical link connection.

The LLC layer operates above a Radio Link Control (RLC) layer on the MS side and above a Base Station Sub-system GPRS Protocol (BSSGP) layer on the SGSN side. Above the LLC layer is a SubNetwork Dependent Convergence (SNDC) protocol layer, that controls the transfer of user data Network layer Packet Data Units  
 10 (N-PDU) between a MS and SGSN. Also above the LLC layer locates a GPRS Mobility Management (GMM) protocol layer, that uses the services of the LLC layer to transfer messages between a MS and a SGSN.

A MAC (Media Access Control) protocol layer locates under a RLC layer on the MS side. It defines the procedures that enable multiple MSs to share a common radio interface and it allows a MS to use several physical channels in parallel on the  
 15 MS side of the GPRS network. The MAC also provides the arbitration between multiple MSs simultaneously attempting to access a radio interface.

A RLC/MAC layer protocol of the GPRS is described in the document 3GPP TS 44 060 V4.5.0 (2002-02) [2]. A RLC/MAC block is a protocol data unit exchanged between RLC/MAC entities, and a RLC/MAC control block is a part of a RLC/MAC  
 20 block carrying a control message between RLC/MAC entities or RLC data block is a part of a RLC/MAC block carrying user data or signalling data of upper layers. The RLC layer defines the procedures for segmentation and reassembly of LLC PDUs into RLC/MAC blocks and the RLC layer provides also link adaptation. The  
 25 RLC/MAC is responsible for transmitting LLC PDUs over the radio interface using a Temporary Block Flow (TBF), which is a physical radio connection supporting the unidirectional transfer of LLC PDUs between a MS and the network. A LLC PDU contains user data or GPRS protocol related signalling messages, such as a GMM signalling message (GMM/SM). A MS may have an uplink TBF (UL TBF),  
 30 a downlink TBF (DL TBF) or an uplink and downlink TBF established at any time. When a transfer mode of LLC PDUs terminates, in either uplink or downlink direction, the corresponding TBF is released and the MS returns to packet idle mode. When a transfer mode of LLC PDUs terminates but there exists an on-going LLC PDU transfer to the other direction, the MS stays in transfer mode.

One TBF may carry RLC data blocks only in one RLC mode at a time. This means that when transferring in-sequence LLC PDUs utilizing different RLC modes (ACK or UNACK), a previous TBF has to be released and a new TBF has to be established for a new RLC mode. The LLC is intended for use with both acknowledged (LLC ACK) and unacknowledged (LLC UNACK) data transfer and the RLC/MAC supports both the RLC ACK mode and RLC UNACK mode. The LLC modes and the RLC modes are independent from each other. In the LLC ACK mode the LLC provides a reliable service with in-order delivery but in the LLC UNACK mode the LLC does not guarantee in-order delivery. In RLC ACK mode RLC uses retransmissions to guarantee error-free transmission and in RLC UNACK mode retransmissions are not used. In both modes RLC/MAC specification says that upper layer PDUs shall be delivered in the order they are received from upper layers. In RLC UNACK mode one lost RLC data block may result in discarding of the whole LLC PDU at the receiving side. In the RLC ACK mode Backward Error Correction (BEC) procedures enable the selective retransmission of unsuccessfully delivered RLC/MAC blocks.

According to the Technical Specifications 3GPP TS 44 064 V 4.3.0 [1] the RLC shall deliver LLC PDUs received from the upper layers in the same order as they were received from the upper layers. This means that LLC PDUs are delivered in the same order as received from the upper layers (i.e. LLC layer), regardless of the fact that some LLC PDUs may have e.g. higher priority than other LLC PDUs. This is a big problem when transferring e.g. real-time or other delay sensitive data over the radio interface, because also this data, despite of its high priority, have to hold on the transmitting queue of in-order delivery. This may impair the QoS of the application.

The LLC allows data transfer with different service criteria, such that high-priority data transfers may take precedence over lower-priority data transfers to the same MS. A LLC PDU has certain QoS characteristics concerning the RLC mode, priority, throughput, etc. When streaming data or otherwise delay sensitive data, such as speech, is transferred over the GPRS network, it should be delivered before e.g. best effort data, such as FTP (File Transfer Protocol) data or web surfing, to ensure the QoS. Otherwise the service suffers bad quality. Recently an interest towards transferring delay sensitive data over the GPRS network is rising.

An example is now provided to describe the current state of the prior art. Assume that the RLC/MAC of the MS first receives three short LLC PDUs from a delay sensitive application that needs to be transmitted using the RLC UNACK mode. Af-

ter this the RLC/MAC receives two long ,e.g. 1500 octet each, LLC PDUs containing FTP data that needs to be transmitted using the RLC ACK mode. Then after this the RLC/MAC again receives three short LLC PDUs from the delay sensitive application that needs to be transmitted using the RLC UNACK mode. When changing a

5 transfer mode from the RLC UNACK mode to the RLC ACK mode, first an existing TBF is released, then a new TBF is established and then FTP traffic LLC PDUs are transferred in RLC data blocks. After this a transfer mode is changed from the RLC ACK mode to the RLC UNACK mode again by releasing existing TBF and establishing new TBF, and then a transfer of data packets of the delay sensitive

10 application may continue. A time needed to transfer FTP traffic LLC PDUs in the RLC data block depends on the number of assigned uplink PDCHs. The elapsed time also depends on a channel coding scheme used to transfer RLC data blocks over the radio interface and how frequently the TBF is assigned sending permissions. In this example, a transfer of two 1500 octet long LLC PDUs in the RLC

15 ACK mode between the delay sensitive data packets may take several seconds. The gap of several seconds will result in that delay sensitive applications will substantially suffer from the FTP transfer.

The gap of several seconds will result in that a transfer of real time LLC PDUs of applications using streaming or otherwise delay sensitive data will be blocked by a

20 transfer of non-real time LLC PDUs of applications using FTP or other best effort data according to the current specifications. In case of a speech application the quality of the conversation becomes unacceptable. From the foregoing it follows that the current GPRS network is unable to transfer delay sensitive data over the radio interface.

25 There are significant problems related to prior art to transfer delay sensitive data over the GPRS network. Grounds for the problems in prior art is the fact that a RLC/MAC does not interpret contents of a LLC PDU at all, and it only transfers a LLC PDU, such as received from a LLC, over a radio interface.

## 30 SUMMARY OF THE INVENTION

An objection of the present invention is to provide a method and system for transferring user data over a network ensuring the best quality of service characteristics.

The objection of the present invention is fulfilled by prioritising a packed user data message delivery according to a data content of a message and by associating the

Packet Data Protocol (PDP) context to the radio interface access points via which the packed data message is transferred over the network.

In accordance with the present invention there is provided a method related to a mobile station for transferring user data in a wireless packet data network, wherein the method comprises steps;

- transferring a first packet data message associated to the packet data protocol (PDP) context with a first connection information,
- transferring a second packet data message associated to the packet data protocol (PDP) context with a second connection information,
- 10 - buffering said first packet data message and said second packet data message into a packet data transfer queue, and
- delivering said first packet data message before said second data message.

In accordance with the present invention there is provided a mobile station (MS) for transferring user data in a wireless packet data network, the mobile station (MS) comprising a transceiver for transmitting and receiving packet data messages, wherein the mobile station (MS) comprises:

- a controller for generating a protocol activation message for informing the network to activate a packet data protocol (PDP) context for user data transmission,
- 20 - a packet data buffer for buffering a first packet data message associated to the packet data protocol (PDP) context with a first connection information and a second packet data message associated to the packet data protocol (PDP) context with a second connection information into a packet data transfer queue, and for delivering said first packet data message before said second packet data message.

In accordance with the present invention there is provided a method related to a Base Station Controller (BSC) of a wireless network for transferring user data between a mobile station (MS) and a SGSN in a wireless packet data network, wherein the method comprises steps;

- receiving a protocol activation message to activate a packet data protocol (PDP) context for user data transmission,
- associating said packet data protocol (PDP) context to a first packet data message and associating said packet data protocol (PDP) context to a second packet data message, and
- assigning said first packet data message with a first connection information and assigning said second packet data message with a second connection information.

Some embodiments of the invention are described in the dependent claims.

## 10 BRIEF DESCRIPTION OF THE DRAWINGS

Next the present invention will be described in greater detail with reference to exemplary embodiments in accordance with the accompanying drawings, in which:

Figure 1 illustrates a block diagram of a mobile station (MS) according to an embodiment of the present invention.

15 Figure 2 illustrates a flow diagram of a method according to the present invention.

## DETAILED DESCRIPTION

A preferred embodiment of the present invention is prioritising of Logical Link Control (LLC) Packet Data Units (PDUs) when user data is transferred over the radio interface between the Mobile Station (MS) and the GPRS network. According to the invention LLC PDUs are reordered based on their requirements.

According to one embodiment of the invention a Radio Link Control/Media Access Control (RLC/MAC) is able to reorder LLC PDUs inside a RLC/MAC and a LLC associates a Packet Data Protocol (PDP) context to a LLC Service Access Point Indicator (SAPI) intelligently. The present invention enables a LLC PDU to be prioritised in RLC/MAC and thus it enables applications to receive the quality of service they need.

According to another embodiment of the invention LLC PDUs are reordered elsewhere than in a RLC/MAC.

In the following description reordering in a RLC/MAC is used as an example.



Figure 1 shows a block diagram of an embodiment of wireless communication system 3 comprising at least one mobile station (MS) 10, a network 50 and a radio link connection 40 according to the present invention. On the network side of the wireless communication system 3 there is also illustrated in figure 1 a Serving General Packet Radio Service (GPRS) Support Node (SGSN) 55 provided by a wireless network operator, at least one base station controller (BSC) 54 including a Packet Control Unit PCU and at least one base transceiver station (BTS) 51 including antenna 53 to wirelessly communicate with the MS 10 over the radio interface in accordance with a predetermined radio interface specifications. A BTS 51 and BSC 54 are included to a Base Station Sub-system (BSS) 52. The radio interface 40 enables to transfer both voice and data traffic, including an Internet access and web browsing. At least one gateway GPRS support node (GGSN) 58, connected to a SGSN 55 via IP-based GPRS backbone, provides a connection to external data networks 61. According to the present invention the radio interface supports, but is not limited to, General Packet Radio System (GPRS) networks, such as GPRS, Enhanced GPRS (EGPRS), GSM (Global System for Mobile communications) Enhanced Data rate for Global Evolution (EDGE) Radio Access Network (GERAN) and any other enhancements of the GPRS or GSM or combinations thereof. The term GPRS relates to all those in this present application.

In figure 1 a MS 10 may be a handheld radiotelephone, such as a cellular phone, a personal communicator or alike. The MS 10 typically includes a microcontroller unit (MCU) 11 coupled to a display unit 12 and a keyboard unit 13 for a user interface (as well as a microphone and speaker). The MS 10 also contains a digital signal processor (DSP) 17 or equivalent, and a wireless transceiver unit 18 including transmitter, receiver and antenna 19 functions. The MCU 11 is connected to a memory 14 for storing an operation program, received packet data, packet data to be transmitted, and the like. In association with the memory 14 is a buffer unit 15 for storing packet data messages into a transfer queue and for delivering packet data messages from the buffer to provide an in-order delivery of packet data messages according to the present invention.

The memory 14 also includes a Read-Only Memory (ROM) which in association with the MCU 11 provides a Radio Link Control/Medium Access Control (RLC/MAC) unit 11a, a SubNetwork Dependent Convergence Protocol (SNDCP) unit 11c for user data transfer, a GPRS Mobility Management (GMM) unit 11d and a Logical Link Control (LCC) unit 11b to store a program enabling the MCU 11 to execute software routines, layers and protocols required to implement the methods

according to the present invention. The SNDCP unit 11c and GMM unit 11c are locating on the same protocol layer. On the network 50 side in association with the BSC 54 are a RLC/MAC unit 54a and a BSSGP unit 54b, and in association with the SGSN 55 are a BSSGP unit 55a, a LLC unit 55b, a SNDCP unit 55c, and GMM unit 55d. Functional operation of these units is also controlled by software instructions from the network operator's premises. The SNDCP unit 55c and GMM unit 55d are locating on the same protocol layer.

In the GPRS network a packet data message is always transferred via a LLC layer which operates above RLC and BSSGP layers to provide logical links between a MS and its SGSN. Messages transferred via a LLC layer are called LLC packet data unit (LLC PDU) messages. Above a LLC layer is e.g. a SNDC protocol layer which controls the transfer of user data between a MS and SGSN. A data link connection of a LLC layer to provide services e.g. to the GMM and SNDC protocol layers is identified by a Service Access Point Identifier (SAPI) both on the SGSN and MS side. The SAPI is carried in the address field of the frame header of each LLC frame. LLC PDUs are segmented and reassembled into RLC/MAC blocks defined by a RLC layer. A TBF allocated on one or more PDCHs comprises a number of RLC/MAC blocks carrying one or more LLC PDUs. A TBF is temporary and is maintained only for a duration of the data transfer.

When LLC Packet Data Units (LLC PDU) are transferred between a MS 10 and BSS 52 and between a BSS 52 and SGSN 55 a LLC Relay provides services to the RLC layer protocol. An LLC layer connection is identified via Service Access Points (SAP) in the LLC layer. In case the RLC/MAC unit 54a of the network is located in the BSS 52, the LLC relay operates above the RLC/MAC. In case RLC/MAC unit is located in the SGSN, the LLC operates directly above the RLC/MAC. According to specifications [1] the RLC/MAC may be located in the network in the BTS, BSC or SGSN.

A SAP Identifier (SAPI) is used to identify a SAP on the SGSN side of the LLC interface and on the MS side of the LLC interface. In a LLC frame a SAPI includes an address field which is part of a frame header (LLC header). The SAPI identifies upper layer entity that receives a LLC PDU, e.g. a GMM, SMS, SNDCP. For example, if a SAPI is equal to 1 (SAPI=1), this LLC PDU goes to the GMM. A SAPI is also used as an internal LLC information in order to be able to handle PDUs with appropriate QoS characteristics. For example, when a SNDCP PDU using NSAPI (NSAPI is a PDP context ID) is received from a SNDCP, the PDU is transferred

e.g. using the LLC SAPI=3 and during the PDP context activation procedure certain QoS characteristics have been associated to the PDP context.

Figure 2 shows a flow diagram of an embodiment of a method related to a mobile station (MS) for transferring user data in a wireless packet data network according to the present invention. The present invention improves a way to transfer real-time (RT) and otherwise delay sensitive data over radio interface between the MS and the SGSN enabling applications to receive service they need.

In step 201 the MS 10 generates a protocol activation message for informing the network to activate a packet data protocol (PDP) context for user data transmission. To do this, the GMM unit 11d generates a GMM/SM message "Activate PDP Context Request" and moves it to the LLC unit 11b to pack it to be a LLC PDU message. The LLC unit 11b associates a LLC PDU message to the LLC GMM SAPI and defines a LLC mode to be used to transfer the LLC PDU message. The LLC modes are a LLC ACK mode and LLC UNACK mode which are independent of a RLC mode. Then LLC unit 11b moves the LLC PDU message to the RLC/MAC unit 11a to transfer it over the network.

Then the MS 10 in step 203 sends to the network "Activate PDP Context Request" message. The RLC/MAC unit 11a transfers this LLC PDU message consisting a LLC header including a SAPI to the RLC/MAC unit 54a locating in the BSC 54 where it is transmitted to the SGSN 55 according to step 204. LLC unit 55b identifies the SAPI from the LLC header of the LLC PDU message. Then the LLC unit 55b moves a data content of the LLC PDU to the GMM/SM unit 55d according to the SAPI. Next, the GMM/SM unit 55d either accepts or rejects the request by transmitting a message "Activate PDP Context Accept" (step 205) or "Activate PDP Context Reject" (step 207). If the GMM/SM unit 55d accepts the PDP context activation, all information needed to route a user data is available to all GPRS network entities. E.g. a GGSN knows the IP address to be used and can route user data packets to the right SGSN serving the MS (GGSN is unaware of LLC). In association with activating PDP context QoS characteristics are also defined for the PDP context (and user data transferred using the PDP context).

When a PDP context is activated in step 207, the LLC unit 55b associates the PDP context to a LLC SAPI based on QoS requirements of the PDP context according to the Technical Specifications 3GPP TS 23.060 V 3.12.0 "General Packet Radio Service (GPRS); Service description" [3]. It says about multiplexing of N-PDUs from one or several NSAPIs onto one LLC SAPI that NSAPIs which are multiplexed

onto the same SAPI shall use the same radio priority level, QoS traffic handling priority, and traffic class. This means that if a MS has two active PDP contexts, the PDP context transferring delay sensitive data and the PDP context transferring best effort data can't be associated to the same SAPI according to specifications. Thus,

5 different PDP contexts shall use a different LLC SAPI and similar PDP contexts may use the same LLC SAPI. However in case of two quite similar PDP contexts, they may also be defined to use a different LLC SAPI in order to be able to reorder LLC PDUs belonging to different PDP contexts. An example: two streaming PDP contexts are activated, one carries voice and the other carries video. Usually if a

10 video gets stuck for a while, it doesn't matter as much as if there's a break in voice. Therefore by prioritising voice over video in this case, we obtain better result.

When transferring user data a SNDCP unit 55c becomes active in stead of a GMM unit 55d. In step 209 a SNDCP unit 55c receives a user data packet. Then it segments a user data packet and transfers it to the LLC unit 55b. The user data packet

15 carries a NSAPI identifier of the PDP context. A NSAPI is one way to identify data belonging to different PDP context. Because a SNDCP and LLC share an internal interface, the LLC unit knows on the basis of the NSAPI to which LLC SAPI the user data packet must be connected. After this the LLC unit 55b packs the user data packet to a LLC PDU message containing the user data, a LLC header and a frame

20 check sequence (FCS). FCS is used to detect bit errors in the frame header and user data field. In this phase the LLC unit 55b labels the LLC PDU message with a LLC window number, on the basis on which a receiving LLC unit 11b can process the LLC PDU message properly. The LLC unit 55b then passes the LLC PDU message to the RLC/MAC unit 54a. The LLC PDU message contains information how the

25 RLC/MAC unit has to process it. This information includes e.g. a RLC mode, throughput and priority information. According to this information RLC/MAC unit 54a is able to transfer the LLC PDU over the radio in appropriate way. A new TBF may not have to be established in case there already exists one.

Then in step 211 the RLC/MAC unit 54a reads a LLC SAPI from the LLC header

30 of each LLC PDU message containing user data packets and reorders certain LLC PDU messages on the basis of the LLC SAPI. Based on LLC PDU a RLC/MAC unit is able to read which LLC SAPI the LLC PDU uses. Based on the additional QoS information received along the LLC PDU, RLC/MAC unit is able to prioritise LLC PDUs not utilizing the same LLC SAPI. The RLC/MAC unit doesn't know

35 what kind of QoS characteristics are used for a certain LLC SAPI, but the information is received along the LLC PDU. When a PDP context has been associated to a

certain LLC SAPI, all LLC PDUs associated to this PDP context are routed via LLC layer using this same LLC SAPI.

When RLC/MAC unit receives LLC PDU, the RLC/MAC checks if it has already buffered LLC PDUs (steps 211 and 217). In case there are buffered LLC PDUs and the received and the buffered LLC PDUs utilize different LLC SAPI or the same LLC SAPI but different LLC mode (ACK/UNACK), RLC/MAC is able to reorder the LLC PDUs according to their QoS requirements (steps 215). The LLC PDU with higher QoS information is transmitted (steps 213 and 215) before the LLC PDU with lower QoS information (step 219).

10 An example:

A RLC/MAC buffer 15 situation in the beginning: (head) SAPI=7, SAPI=7, SAPI=7 (tail)

A new LLC PDU with LLC SAPI=3 is received. According to QoS received along the LLC PDUs, if QoS of LLC PDU using SAPI=3 is higher than QoS of LLC PDUs using LLC SAPI=7, a RLC/MAC buffer looks like:

RLC/MAC buffer 15 situation: (head) SAPI=3, SAPI=7, SAPI=7, SAPI=7 (tail)

Otherwise if QoS of a LLC PDU using SAPI=3 is lower than QoS of LLC PDUs using LLC SAPI=7, a RLC/MAC buffer looks like:

RLC/MAC buffer 15 situation: (head) SAPI=7, SAPI=7, SAPI=7, SAPI=3 (tail)

20 The RLC/MAC unit 54a of the network indicates to the RLC/MAC unit 11a, and vice versa, if the RLC ACK mode or the RLC UNACK mode is to be used. When using RLC ACK mode the MS 10 can be sure that a transferred LLC PDU is received by the network 50. A transmitting RLC/MAC unit always tells a receiving RLC/MAC unit in association a TBF establishment which RLC mode is used to transfer LLC PDUs.

25 Throughput of RT data should be ensured and NRT data should be buffered in case there is RT data to be transmitted. An advantage of reordering LLC PDUs compared to the FTP example described in the background section of prior art is that RT data is transmitted before NRT data and thus RLC mode doesn't have to be changed in the middle of the TBF (TBF release and establishments) in case RT data and NRT data use different RLC mode.

If during data transfer LLC PDU using different RLC mode than the one used with existing TBF is received, MS/PCU 10, 54 shall check if the sending of the LLC PDU may be delayed and possibly if LLC PDUs may be reorganized. Only after transferring LLC PDUs having higher priority, the LLC PDUs using different RLC mode shall be transmitted.

In case RLC/MAC unit 54a has reorganized and delayed the transmission of LLC PDU transmission not carrying high priority data, RLC/MAC unit shall be able to determine when it may transmit the delayed LLC PDUs not carrying high priority data. There are three alternative ways to detect an end of a high priority data transfer:

One alternative is that after sending the last LLC PDU carrying high priority data RLC/MAC unit 54a starts transmitting LLC PDUs not carrying high priority data. As soon as new high priority data is received, RLC/MAC unit finishes the ongoing transmission of LLC PDU not carrying high priority data and after that continues transmission with LLC PDUs carrying high priority data. This alternative creates some delay between two subsequent high priority data packets, depending on the length and RLC mode of the LLC PDU not carrying high priority data.

Another solution to the problem is that after sending the last LLC PDU carrying high priority data RLC/MAC unit 54a starts a timer with short timeout value (e.g. 100-200ms). If the timer expires and RLC/MAC unit hasn't received new high priority data, RLC/MAC is allowed to start transmission of LLC PDUs not carrying high priority data.

A third alternative is that the RLC/MAC unit 54a waits until high priority frames in RLC/MAC buffer 15 have been transmitted. In case RLC/MAC unit runs (temporarily) out of high priority data, RLC/MAC starts to transmit other LLC PDUs located in RLC buffer. If RLC receives new high priority data during transmission of low priority data, RLC/MAC unit could interrupt transmission of the current LLC PDU by generating LLC PDU border into RLC data block and continue transmitting LLC PDUs carrying high priority data in order to avoid delays in high priority data transmission. A downside of this solution is that a fake LLC PDU border might create confusion in LLC (however most likely LLC PDU CRC (FCS) checking would fail).

In the receiving end a SNDCP unit 11c receives a LLC PDU containing user data packet. Then it segments a user data packet and transfers it to the LLC unit 11b.

LLC PDUs are buffered into the transfer queue 15 in association with the memory 14. When a LLC unit 55b sends a LLC PDU to peer LLC unit 11b via RLC/MAC, a LLC unit 11b receiving the transmitted LLC PDU checks that it receives LLC PDUs in-sequence order, what is needed not to break the operation of the LLC layer. This checking is based on a window number inside a LLC header of the LLC PDU. The window number is also used to check if received LLC PDU is a duplicate or a new LLC PDU. The window number increments by one (1) every time when a new LLC PDU is transmitted from LLC unit 11b to the RLC/MAC unit 11a and thus LLC unit 11b checks that the window number of a received LLC PDU also increments in-sequence order (1, 2, 3, ...). Each LLC SAPI has its own series of window numbers, i.e. LLC SAPI 1 has window numbers (1, 2, 3,...), LLC SAPI 2 (1, 2, 3,...), ..., LLC SAPI 5 (1, 2, 3,...), etc. In case the window number of the received LLC PDU increments in-sequence order, the LLC PDU is transferred to the transfer queue buffer 15. If the window number of the received LLC PDU (e.g. 1) was smaller than that of the previous LLC PDU (e.g. 50), i.e. the in-sequence order is not valid, the received LLC PDU may be discarded. The RLC/MAC unit 11a only transfers the LLC PDU message and it doesn't concern the contents of the LLC PDU message.

The MS 10 may also propose a LLC SAPI to be used with the PDP context but in any case the SGSN 55 determines a used LLC SAPI eventually.

A feature according to a method of the present invention may be implemented in a mobile station (MS) 10, in a Serving General Packet Radio Service (GPRS) Support Node (SGSN) 55, and in a Packet Control Unit (PCU) containing network RLC/MAC 61 in association with a Base Station Controller (BSC) 53 or a mobile switching center (MSC).

The invention is not restricted to the embodiments described above. While a preferred embodiment of the present invention is disclosed herein for purposes of explanation, numerous changes, modifications, variations, substitutions and equivalents in whole or in part should now be apparent to those skilled in art to which the invention pertains. Accordingly, it is intended that the present invention be limited only the spirit and scope of the hereto appended claims.

**Claims**

1. A method related to a mobile station for transferring user data in a wireless packet data network, wherein the method comprises steps;
  - 5       - transferring a first packet data message associated to the packet data protocol (PDP) context with a first connection information,
  - transferring a second packet data message associated to the packet data protocol (PDP) context with a second connection information,
  - buffering said first packet data message and said second packet data message into a packet data transfer queue, and
  - 10       - delivering said first packet data message before said second data message.
2. A method according to claim 1, wherein the method comprises further steps:
  - 15       - generating a protocol activation message for informing the network to activate a packet data protocol (PDP) context for user data transmission, and
  - transmitting said protocol activation message to the network to associate the packet data protocol (PDP) context to a first packet data message with a first connection information and to a second packet data message with a second connection information,
- 20   3. A method according to claim 1, wherein the method comprises further step:
  - buffering said second packet data messages into a packet data transfer queue for a period of time said first packet data message transfer is ongoing, and
  - 25       - delivering said second packet data messages after said first packet data message delivery is completed.
4. A method according to claim 2, wherein the method comprises a step of requesting an uplink resource for transmitting said protocol activation message.



5. A method according to claim 2, wherein the method comprises a step of requesting an uplink Temporary Block Flow (TBF) for transmitting said protocol activation packet data unit (PDU) message.
6. A method according to claim 1, wherein said first packet data message contains first user data to be associated said packet data protocol (PDP), and said second packet data unit (PDU) message contains second user data to be associated said packet data protocol (PDP).
7. A method according to claim 6, wherein said first user data is fixed with the same QoS profile, and said second user data is fixed with the same QoS profile that differs from the QoS profile fixed with said first user data.
8. A method according to claim 1, wherein the step of transferring comprises a preliminary step of checking that said first packet data messages and said second packet data messages are received in-sequence order according said connection information of said first packet data message or said second packet data message.
9. A method according to claim 1, wherein the wireless packet data network is comprised of a General Packet Radio Service (GPRS) network, wherein said first packet data messages and said second packet data messages are Logical Link Controller (LLC) packet data unit (PDU) messages, and where the protocol activation message activates a GPRS Mobility Management (GMM) unit to associate the packet data protocol (PDP) context to said first packet data messages and to said second packet data messages.
10. A method according to claim 9, wherein a Logical Link Controller (LLC) unit assigns a first Service Access Point Indicator (SAPI) of a GPRS Mobility Management (GMM) unit to associate said first connection information of said first packet data message, and a second Service Access Point Indicator (SAPI) of a GPRS Mobility Management (GMM) unit to associate said second connection information of said second packet data message; said first SAPI value being different than said second SAPI value.
11. A method according to claim 9, wherein a Radio Link Control/Medium Access Control (RLC/MAC) unit initiates an uplink Temporary Block Flow (TBF) and indicates to a Radio Link Control/Medium Access Control (RLC/MAC) of the network if a RLC ACK or a RLC UNACK mode is to be used when transmitting packet data messages.

12. A method according to claim 11, wherein Radio Link Control/Medium Access Control (RLC/MAC) of the mobile station (MS) orders said first packet data message to be delivered in the RLC UNACK mode and said second packet data to be delivered in the RLC ACK mode.

5 13. A method according to claim 9, wherein the step of transferring comprises a preliminary step of checking that said first packet data messages and said second packet data messages are received in-sequence order according a window number inside a Logical Link Control (LLC) header of said first packet data message or said second packet data message.

10 14. A mobile station (MS) for transferring user data in a wireless packet data network, the mobile station (MS) comprising a transceiver for transmitting and receiving packet data messages, wherein the mobile station (MS) comprises:

- a controller for generating a protocol activation message for informing the network to activate a packet data protocol (PDP) context for user data transmission,

15

- a packet data buffer for buffering a first packet data message associated to the packet data protocol (PDP) context with a first connection information and a second packet data message associated to the packet data protocol (PDP) context with a second connection information into a packet data transfer queue, and for delivering said first packet data message before said second packet data message.

20

15. A mobile station (MS) according to claim 14, wherein said packet data buffer is arranged to buffer said second data messages into a packet data transfer queue for a period of time said first packet data message transfer is on-going, and to deliver said second packet data messages after said first packet data delivery is completed.

25

16. A mobile station (MS) according to claim 14, wherein the controller requests an uplink Temporary Block Flow (TBF) for transmitting said protocol activation message.

30

17. A mobile station (MS) according to claim 14, wherein said first packet data message is arranged to contain first user data to be associated said packet data protocol (PDP) and said second packet data unit (PDU) message is arranged to contain second user data to be associated said packet data protocol (PDP).

18. A mobile station (MS) according to claim 17, wherein said first user data is fixed with the same QoS profile, and said second user data is fixed with the same QoS profile that differs from the QoS profile fixed with said first user data.

5 19. A mobile station (MS) according to claim 14, wherein the controller, during reception, is arranged to check that said first packet data messages and said second packet data messages are received in-sequence order according a connection information of said first packet data message or said second packet data message.

10 20. A mobile station (MS) according to claim 14, wherein the wireless packet data network is arranged to comprise of a General Packet Radio Service (GPRS) network, wherein said first packet data messages and said second packet data messages are Logical Link Controller (LLC) packet data unit (PDU) messages, and where the protocol activation message is arranged to activate a GPRS Mobility Management (GMM) unit to associate the packet data protocol (PDP) context to said first packet data messages and to said second packet data messages.

15 21. A mobile station (MS) according to claim 20, wherein a Logical Link Controller (LLC) unit is arranged to assign a first Service Access Point Indicator (SAPI) of a GPRS Mobility Management (GMM) unit to be associated to said first connection information of said first packet data message, and a second Service Access Point Indicator (SAPI) of a GPRS Mobility Management (GMM) unit to be associated to  
20 said second connection information of said second packet data message; said first SAPI value being different than said second SAPI value.

22. A mobile station (MS) according to claim 21, wherein a Radio Link Control/Medium Access Control (RLC/MAC) unit is arranged to initiate an uplink Temporary Block Flow (TBF) and arranged to indicate to a Radio Link Control/Medium Access Control (RLC/MAC) of the network if a RLC ACK or a RLC  
25 UNACK mode is to be used when transmitting packet data messages.

23. A mobile station (MS) according to claim 22, wherein Radio Link Control/Medium Access Control (RLC/MAC) is arranged to order said first packet data message to be delivered in the RLC UNACK mode and said second packet data to  
30 be delivered in the RLC ACK mode.

24. A mobile station (MS) according to claim 14, wherein the controller, during reception, is arranged to check that said first packet data messages and said second packet data messages are received in-sequence order according a window number

inside a Logical Link Control (LLC) header of said first packet data message or said second packet data message.

25. A method related to a Base Station Controller (BSC) of a wireless network for transferring user data between a mobile station (MS) and a SGSN in a wireless packet data network, wherein the method comprises steps;

- receiving a protocol activation message to activate a packet data protocol (PDP) context for user data transmission,
- associating said packet data protocol (PDP) context to a first packet data message and associating said packet data protocol (PDP) context to a second packet data message, and
- assigning said first packet data message with a first connection information and assigning said second packet data message with a second connection information.

26. A method according to claim 25, wherein the method comprises further a step of transmitting and receiving said first packet data message with a first connection information and said second packet data message with a second connection information

27. A method according to claim 25, wherein in the step of associating said first packet data message contains first user data to be associated said packet data protocol (PDP) and said second packet data message contains second user data to be associated said packet data protocol (PDP).

28. A method according to claim 27, wherein said first user data is fixed with the same QoS profile, and said second user data is fixed with the same QoS profile that differs from the QoS profile fixed with said first user data.

29. A method according to claim 25, wherein in the step of assigning a Logical Link Controller (LLC) unit assigns a first Service Access Point Indicator (SAPI) of a GPRS Mobility Management (GMM) unit to associate said first connection information of said first packet data message, and a second Service Access Point Indicator (SAPI) of a GPRS Mobility Management (GMM) unit to associate said second connection information of said second packet data message; said first SAPI value being different than said second SAPI value.

30. A method according to claim 25, wherein a Radio Link Control/Medium Access Control (RLC/MAC) unit notifies the indication from the mobile station (MS) if a RLC ACK or a RLC UNACK mode is to be used when transmitting packet data messages.

5

□

**(57) Abstract**

A method and device according to the present invention re-orders Logical Link Control (LLC) Packet Data Units (PDUs) when user data is transferred over the radio interface between a Mobile Station (MS) and a packet data network. An objection of the present invention is to provide a method and system for transferring user data over a network ensuring the best quality of service characteristics.¤


**(57) Sammandrag**

¤


Kuvio ¤

L5

3

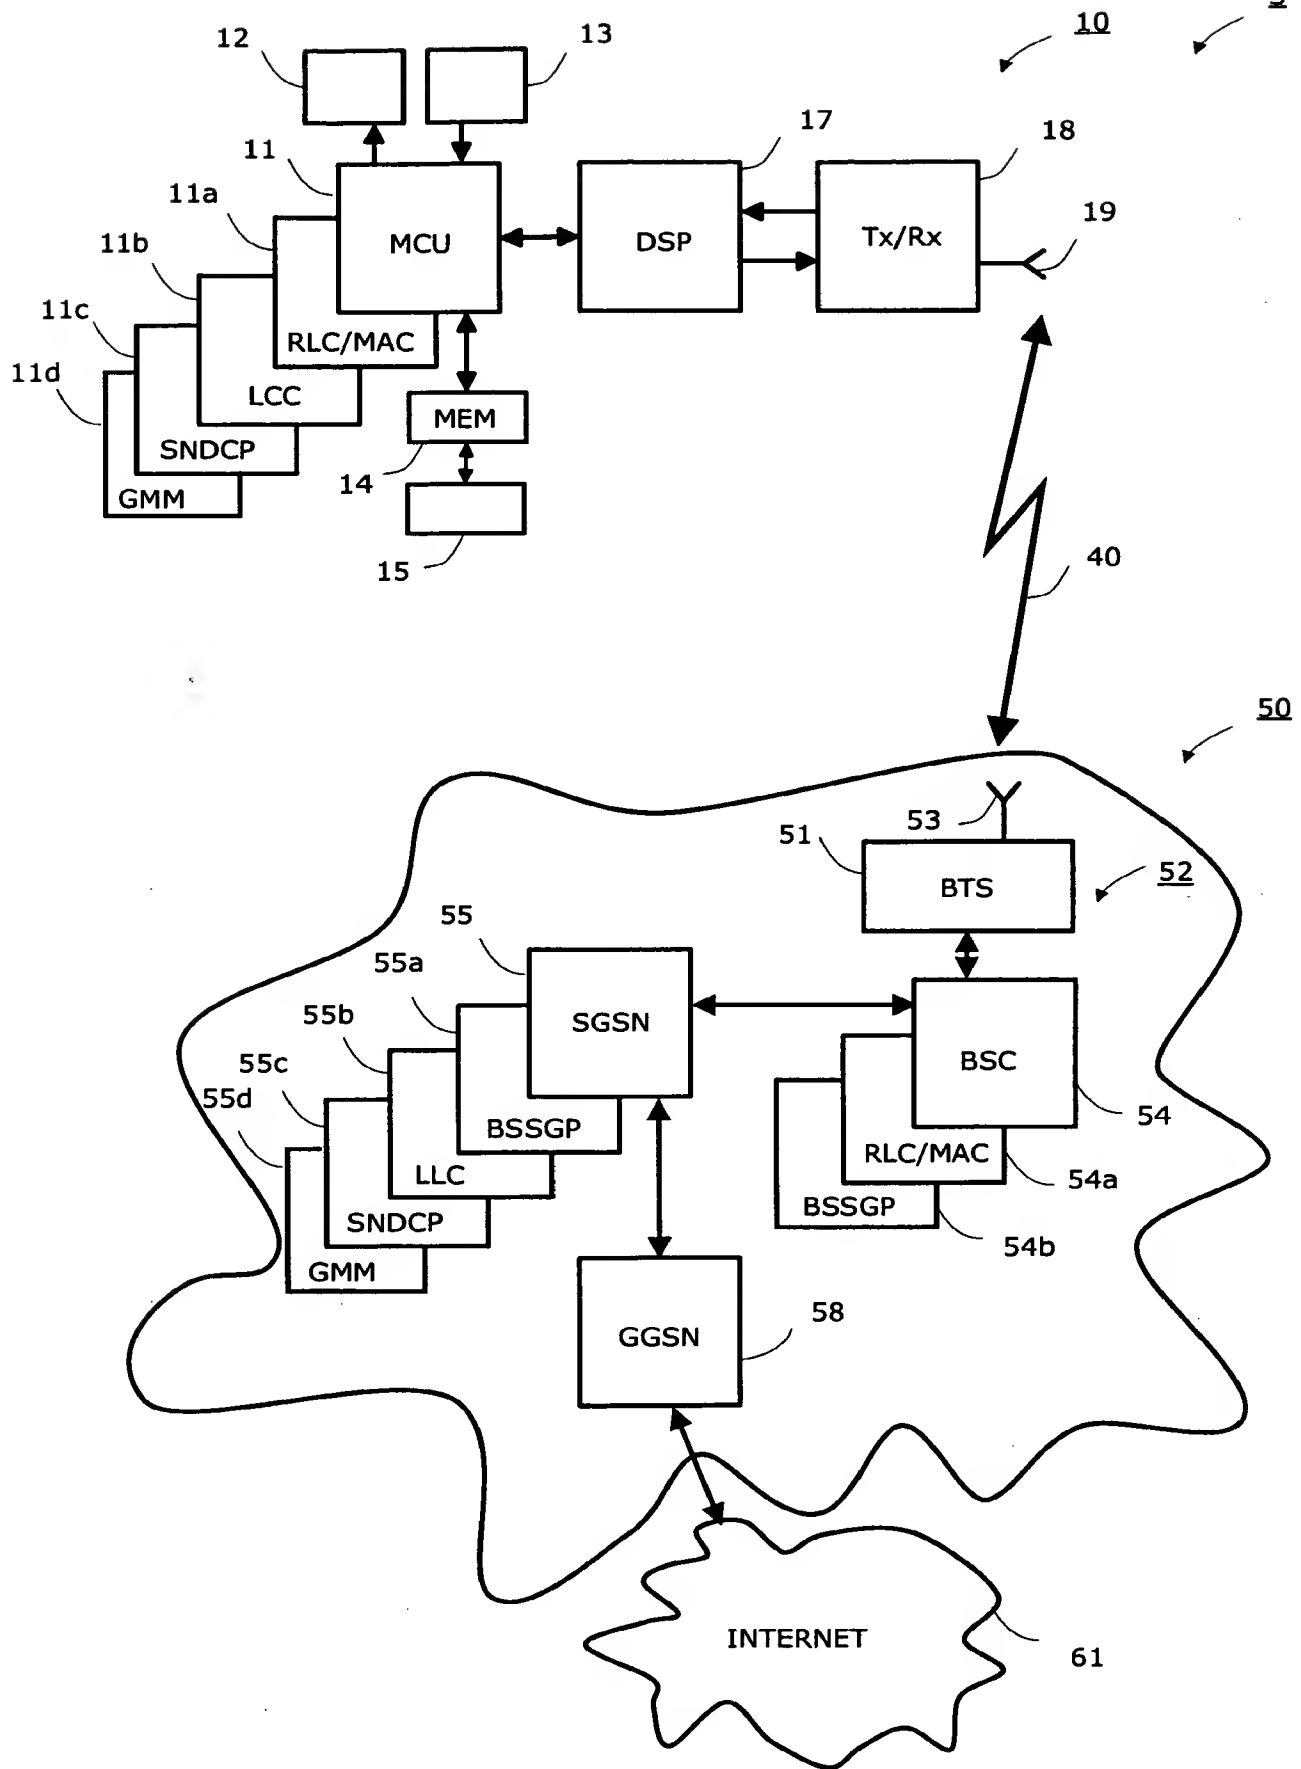

**FIG 1.**

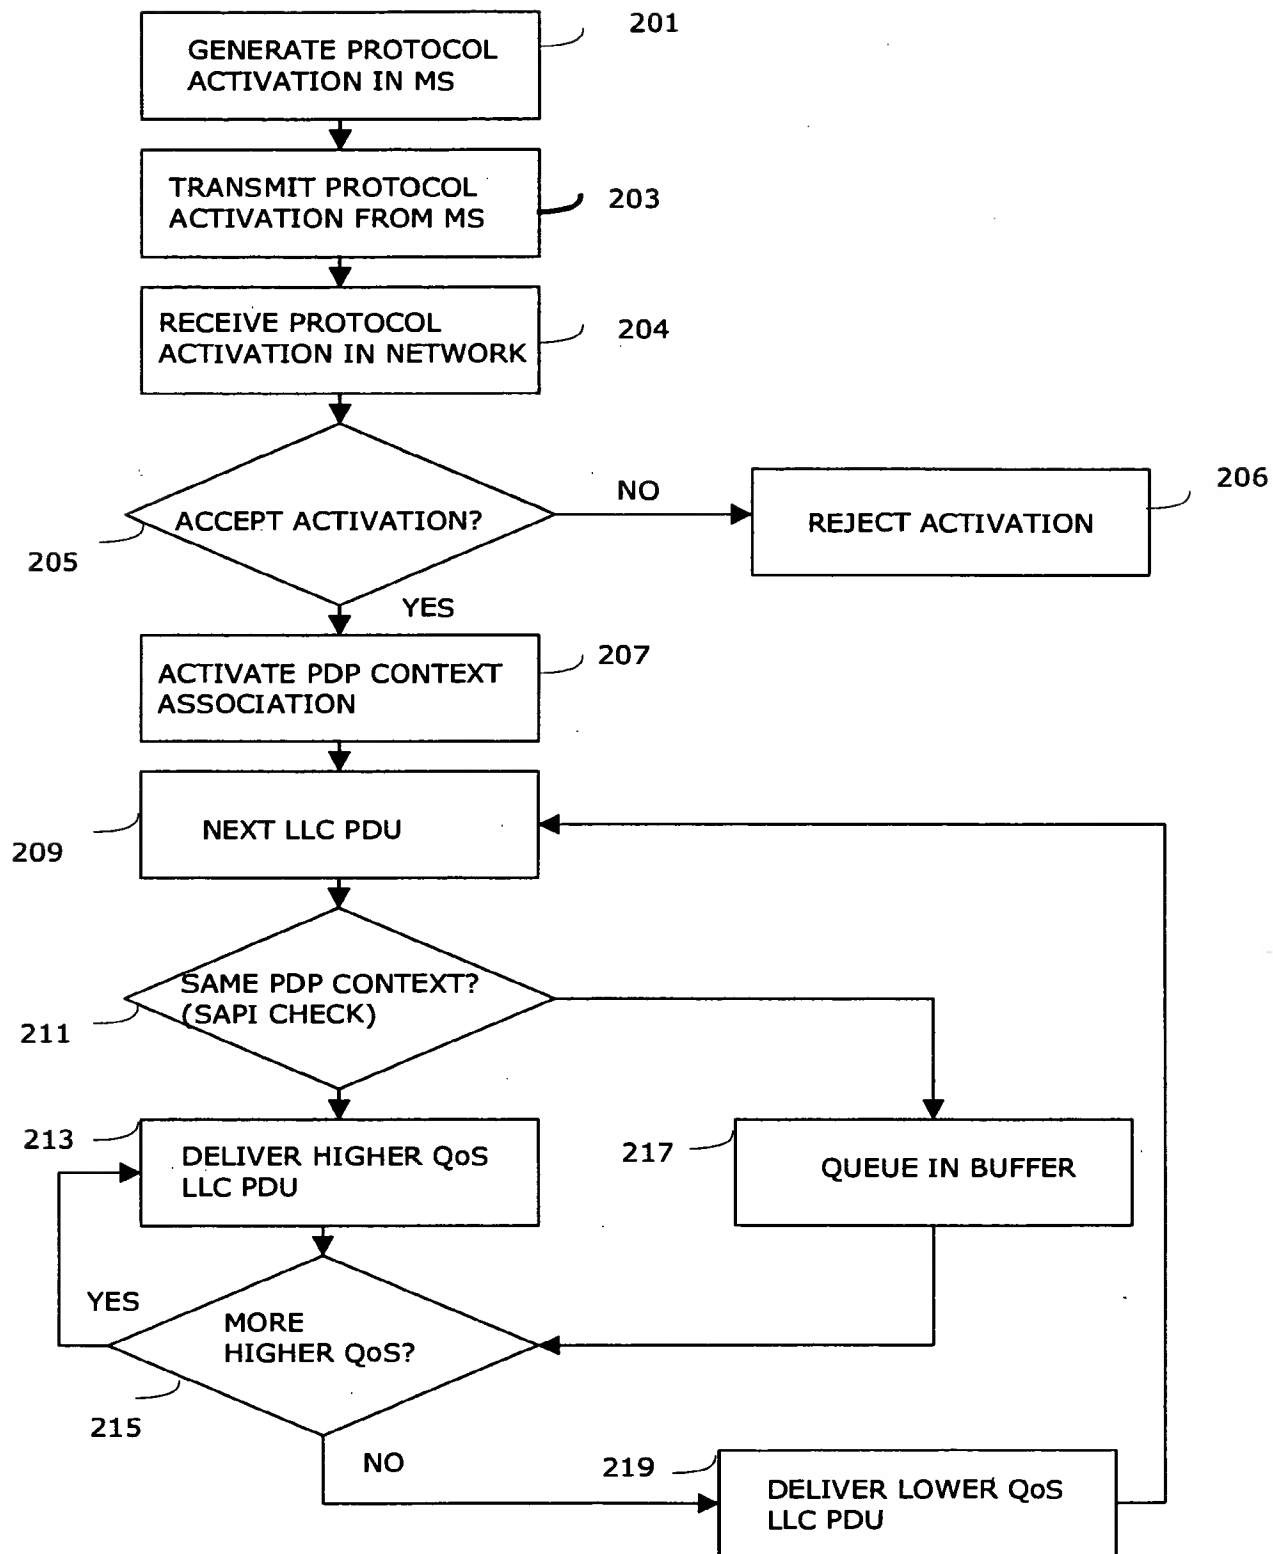**FIG 2.**